ULTRATECH INTERNATIONAL, INC.

Ultra-Track Pans® Composite Models

Product Data Sheet

+ Modular, composite system – can be built and designed to almost any length depending on spill containment requirements.
+ Easy installation - minimal site preparation (no excavation) required.
+ Constructed with high strength, non-porous, corrosion resistant fiberglass for years of reliable service.
+ Low profile: 20’ long x 4 7/8” high
+ Pandrol compatible
+ Rail side gasket sealing system – prevents spills from leaking between Track Pans and rails.
+ Ultra-Track Pans may be used independently, or connected to other Pans via an optional drainage manifold.
+ Drainage manifold comes standard with clean out port to allow for removal of sludge blockages, etc. Installation requires half the ballast excavation of others ensuring tie foundation integrity.

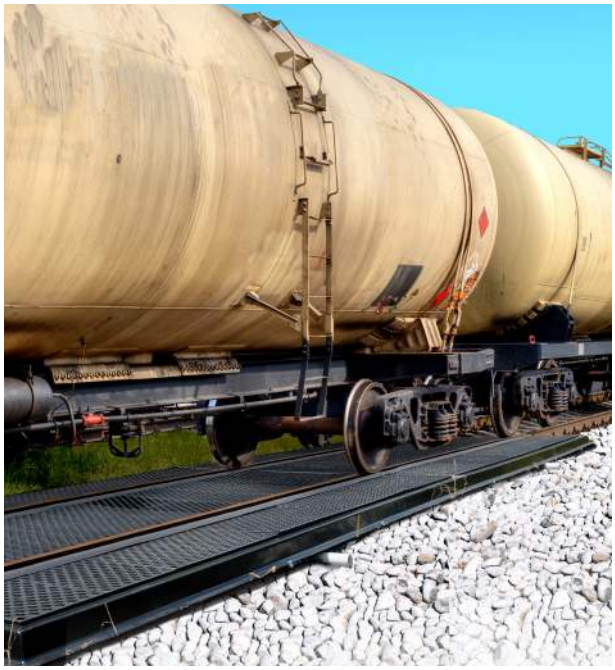

Part#	**Description**	**Dimensions** in. (mm)	**Containment Capacity** gal. (L)	**Weight** lbs. (kg)
7200	Center Pan	255 x 57¼ x 4½ (6,477 x 1,448 x 114)	209 (791) With grating: 191 (723)	177 (80) With grating: 191 (723)
7210	Side Pan	255 x 36 x 4½ (6,477 x 914 x 114)	98 (371) With grating: 89 (337)	100 (45) With grating: 89 (337)

Options: **7220** Drain Manifold Center & Sides · **7223** Drain Manifold Center Only · **7225** Rail Gasket · **0420** Grating

UltraTech International, Inc. · 11542 Davis Creek Court, Jacksonville, Florida 32256 USA
1-904-292-1611 · trackpans.com

Rev. 07.16.25